





- Recessed interior/exterior fluorescent light
- Available in the following variations
 - One light symmetric
 - Two light symmetric
 - One light asymmetric
- The body is made in extruded aluminium with an anodised finish
- The diffuser is 6mm thick and made in tempered glass
- Spider comes complete with die-cast aluminium end caps, silicon gaskets and A4 stainless steel screws
- The cable gland position on the spider allows for the placement of lighting modules close to each other (fig. 1) the modules are wired through for continuous line connection (requires 3983.PC)
- Can be installed on normally flammable surfaces
- Class 2
- IP 65


Fig. 1



One Light Symmetric




Two Light Symmetric



One Light Asymmetric







code lamp details

Single lamp symmetric

3982.1 54W 230V G5

Complete with electronic control gear


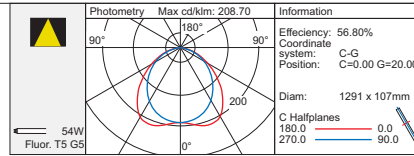


code lamp details

Double lamp symmetric

3982.2 2 x 54W 230V G5

Complete with electronic control gear


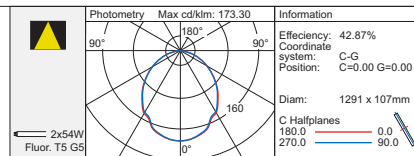


code lamp details


Single lamp asymmetric

3982.3 54W 230V G5

Complete with electronic control gear

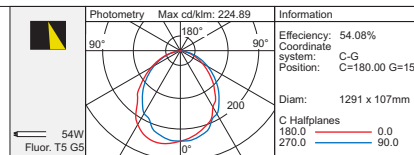


Accessories



code details

Reversed housing in galvanised plate

3982.JAD.C54



code details

Fixing hook for ceiling use

3982.DUC.MF3 - pair



code details

Cable gland IP 65

3983.PC